

FIBER OPTIC ADAPTOR LC-SC

Singlemode, Duplex


General Description

Metal adapters containing precision zirconia ceramic alignment sleeve used to mate LC to SC Connectors.



Basic Construction

LC-SC Duplex Adapter

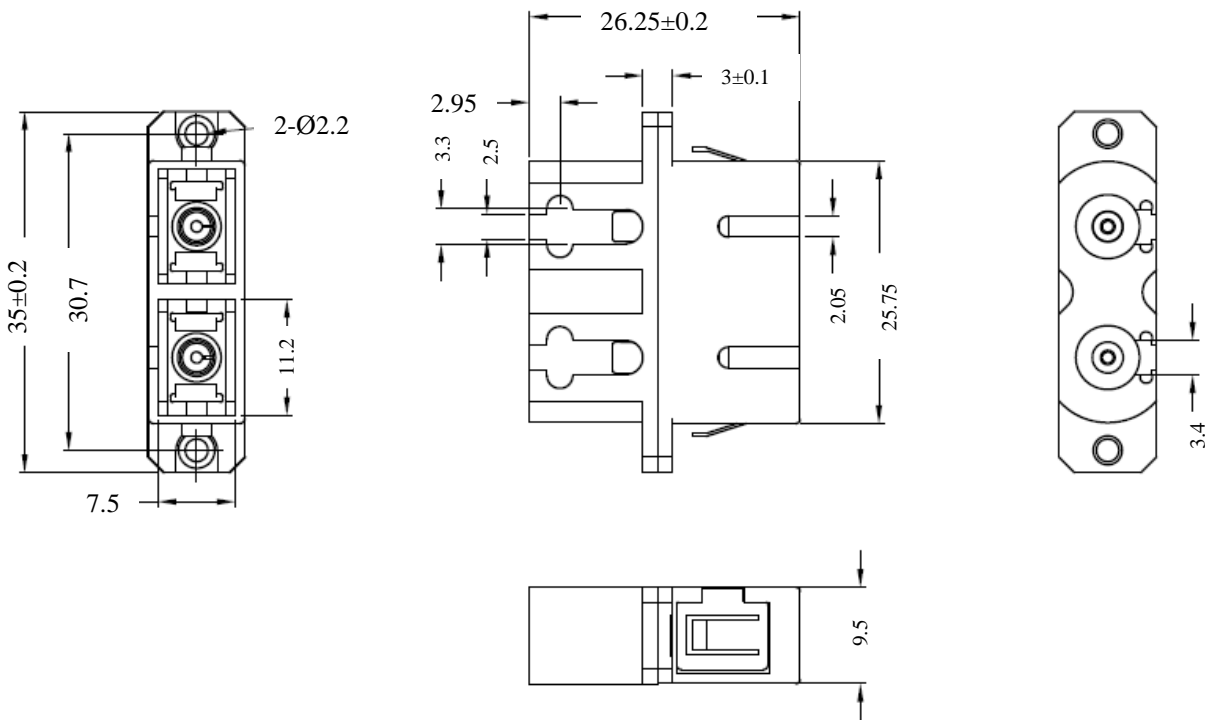

Note: All units of measurement in millimeter

Applications

- Telecommunication networks
- Data communication networks
- CATV networks
- Active device termination
- Instrumentation

TERMINATION ACCESSORIES

Mechanical Properties

Operating Temperature: -20°C ~ 75°C

Storage Temperature: -40°C ~ 75° C

Durability: 500 matings

Ordering Information

Part#	Sleeve	Style	Type	Colour
ALCSCSM-DX	Zirconia	Flanged/Duplex	Singlemode	Metal

